

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

# NOTICE OF ACCEPTANCE (NOA)

PRODUCT CONTROL SECTION 11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

**MIAMI-DADE COUNTY** 

CGI Windows & Doors, Inc. 3780 W. 104<sup>th</sup> Street Hialeah, FL 33018

#### Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "Sentinel 165 Balcony Breeze" Single Inswing Aluminum door w/ SHW - LMI

**APPROVAL DOCUMENT:** Drawing No.165FD-IS-NOA Rev A (former 18-26D Rev A), titled "Series Sentinel 165 Balcony Breeze Aluminum Inswing Door", sheets 1 through 10 of 10, prepared by manufacturer, dated 07/14/20, signed and sealed by Lynn A. Miller, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

# MISSILE IMPACT RATING: Large and Small Missile Impact Limitations:

- 1. See sheets 2 for Design Pressure ratings, max. DLO (day light opening) and Threshold types. See sheet 7 for the door and the SHW (Single Hung Window) glazing options and limitations.
- 2. ADA saddle threshold (item #E-24) **not** rated for water infiltration, unless protected by FBC compliant overhang.
- 3. The latch lock (item #M-20& #M-22) and 3-point CGI lock mechanism w/ dead bolts (item #M-21 & M-23) are integral part of each door w/SHW. Also, the SHW is integral part of the single Door.
- 4. The Exterior lite of insulated laminated SHW using glazing option **F**, must be tempered, when used above 30' above the grade (Small Missile Impact area).

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and series and following statement: "Miami-Dade County Product Control Approved", noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews #20-0222.15 consists of this page 1 and evidence pages E-1, E-2, E-3, E4 & E-5, as well as approval document mentioned above.

The submitted documentation was reviewed by Ishaq I. Chanda, P.E.



NOA No. 21-0510.05 Expiration Date: July 28, 2026 Approval Date: June 03, 2021

Page 1

# 1. Evidence submitted under previous approvals

#### A. DRAWINGS

- 1. Manufacturer's die drawings and sections (submitted under file below)
- 2. Drawing No.**AD16-04**, titled "Series Sentinel 165 Balcony Breeze Aluminum Inswing Door", sheets 1 through 13 of 13, prepared by MCY Engineering, Inc., dated JUL 05, 2016, signed and sealed by Yiping Wang, P.E.

# B. TESTS (submitted under files #16-0329.02)

- 1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
  - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
  - 3) Water Resistance Test, per FBC, TAS 202-94 (Std Threshold # E-6)
  - 4) Large Missile Impact Test per FBC, TAS 201-94
  - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
  - 6) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94.

Along with manufacturer's parts and section drawing marked-up drawings of single aluminum Inswing door w/ SHW, prepared by Certified Testing Laboratories, Inc., Test Report No. CTL 3076-1W, dated 12/21/15 for specimen #4, 5, & 6, signed and sealed by Ramesh Patel, P.E.

Along with manufacturer's parts and section drawing marked-up drawings of single aluminum Outswing door w/ SHW, prepared by Certified Testing Laboratories, Inc., Test Report No. CTL 3076W, dated 12/20/15 for specimen #1, 2, & 3, signed and sealed by Ramesh Patel, P.E. (Note: The above test reports have been revised by an addendum letter issued by Certified Testing lab dated June 27, 2016, signed and sealed by Ramesh Patel, P.E.)

2. REF test report HTL 0080-912-97 per SFBC PA 202, 201/203-94.

# C. CALCULATIONS (submitted under files #16-0329.02)

- 1. Anchor verification calculations and structural analysis, complying with FBC-2014(5<sup>th</sup> Edition), prepared by MCY Engineering, Inc., dated MAR 18, 2016, signed and sealed by Yiping Wang, P.E.
- 2. Glazing complies w/ ASTME-1300-02, -04 & -09.

# D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

# E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. **14-0916.11** issued to Kuraray America, Inc. (former E.I. DuPont DeNemours & Co., Inc.) for the "Sentry Glass ® Interlayer", expiring on 07/4/17.
- 2. Notice of Acceptance No. **16-117.01** issued to **Kuraray America, Inc.** (Former E.I. DuPont DeNemours & Co., Inc. for the "Kuraray Trofosil Ultra clear and color PVB Interlayer (Former Kuraray **Butacite** ® **PVB interlayer**)", expiring on 07/08/19.
- 3. Notice of Acceptance No. 14–0423.15 issued to Eastman Chemical Company (MA) (Former Solutia, Inc.) for the "Saflex CP Saflex and Saflex HP Composite Glass Interlayers w/ PET Core", expiring on 12/11/18.

Ishaq I. Chanda, P.E.

Ishaq I. Chanda, P.E. Product Control Unit Supervisor

Product Control Unit Supervisor NOA No 21-0510.05

# F. STATEMENTS

- 1. Statement letter of conformance to FBC 2014(5<sup>th</sup> Edition) and letter of no financial interest, prepared by MCY Engineering, Inc., dated MAR 14, 2016, signed and sealed by Yiping Wang, P.E.
- 2. Lab compliance and addendum letters, as part of the above referenced test reports.

#### G. OTHER

- 1. This NOA revises #16-0329.02, expiring July 18, 2021.
- 2. Test proposal dated 03/21/15 approved by RER.
- 2. Evidence submitted under previous approval.

#### A. DRAWINGS

1. Drawing No.**18-26D Rev A**, titled "Series Sentinel 165 Balcony Breeze Aluminum Inswing Door", sheets 1 through 15 of 15, prepared by AL-Farooq Corporation, dated 01/23/18 and last revised on MAY 02, 2018, signed and sealed by Javad Ahmad, P.E.

#### B. TESTS

- 1. Test reports on:
- 1) Air Infiltration Test, per FBC, TAS 202-94
- 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
- 3) Water Resistance Test, per FBC, TAS 202-94 (Std Threshold # E-6)
- 4) Large Missile Impact Test per FBC, TAS 201-94
- 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
- 6) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94.

Along with manufacturer's parts and section drawing marked-up drawings of aluminum In/out swing door w/sidelites, by Hurricane Testing Laboratory, Inc., Test Report No. **HTL-0080-0304-11** dated 08/03/2011 for specimens #2, 5, 9 12 & 15 (Inswing) and specimens #1, 4, 7 & 8 (outswing) tested per TAS 201, 202 & 203-94, signed and sealed by Vinu Abraham, P.E.

Along with manufacturer's parts and section drawing marked-up drawings of aluminum In/out swing door w/sidelites, by Hurricane Testing Laboratory, Inc., Test Report No. HTL-97055 (0080-912-97) dated 09/23/97 thru 02/27/98 for specimen #1, 2, 3, 4 tested per PA202-94, specimen #4, 5A, 5B, 5C tested per PA201-94 & PA203-94, signed and sealed by Timothy S. Marshall, P.E. (submitted under file # 09-0723.04: Original tests conducted per SFBC, PA 201, 202 & 203-94 now known as FBC, TAS 201, 202 & 203-94)

#### C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC 2017** (6<sup>th</sup> Edition), prepared by Al–Farooq Corporation, dated 02/28/18, signed and sealed by Javad Ahmad, P. E.

#### D. OUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

Ishaq I. Chanda, P.E.

Product Control Unit Supervisor

NOA No 21-0510.05

#### E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **14-0916.11** issued to Kuraray America, Inc. (former E.I. DuPont DeNemours & Co., Inc.) for the "Sentry Glass ® Interlayer", expiring on 07/4/18.

#### F. STATEMENTS

- 1. Statement letter of conformance to **FBC 6<sup>th</sup> Edition (2017)** and of no financial interest, prepared by Al Farooq Corporation, dated 03/05/18, signed and sealed by Javad Ahmad, P.E.
- 2. Statement letter dated May 01, 2018, issued by Al-Farooq Corporation of "Adoption of another Engineer's work" per FLA chapter 61G15-27, signed by Javad Ahmad, P.E.
- 3. Statement letter of ADA threshold evaluation dated FEB 21, 2017, prepared by MCY Engineering, Inc, signed and sealed by Yiping Wang, P.E.

#### G. OTHER

3.

1. This NOA revises NOA # 16-0329.02, expiring 07/28/21.

# Evidence submitted under previous approval

#### A. DRAWINGS

1. Drawing No.165FD-IS-NOA Rev A (former 18-26D Rev A), titled "Series Sentinel 165 Balcony Breeze Aluminum Inswing Door", sheets 1 through 10 of 10, prepared by manufacturer, dated 07/14/20, signed and sealed by Lynn A. Miller, P.E.

# B. TESTS

- 1. Test reports on:
- 1) Air Infiltration Test, per FBC, TAS 202–94
- 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202–94
- 3) Water Resistance Test, per FBC, TAS 202–94
- 4) Large Missile Impact Test per FBC, TAS 201-94
- 5) Cyclic Wind Pressure Loading per FBC, TAS 203–94

along with marked-up drawings and installation diagram of all CGI Windows and Doors, Inc. and PGT Industries, Inc., representative units listed below and tested to qualify **Dowsil 791** and **Dowsil 983** silicones, per Proposal #19-1155TP, prepared by Fenestration Testing Laboratory, Inc., Test Reports No.:

### **CGI** Windows and Doors Inc. test specimens:

FTL-20-2108.1, CGI SH360 Aluminum Single Hung Window (unit 1 in proposal) FTL-20-2108.2, CGI CA238 Alum. Outswing Casement Window (unit 2 in proposal) FTL-20-2108.3, CGI SGD560 Aluminum Sliding Glass Door (unit 3 in proposal) FTL-20-2108.4, CGI PW410 Aluminum Fixed Window (unit 4 in proposal) and FTL-20-2108.5, CGI SH360 Aluminum Single Hung Window (unit 5 in proposal) all dated 08/24/20 and signed and sealed by Idalmis Ortega, P.E.

# PGT Industries, Inc. test specimens:

FTL-7897, PGT PW5520 PVC Fixed Window (unit 6 in proposal), dated 09/03/14
FTL-20-2107.1, PGT SGD780 Aluminum Sliding Glass Door (unit 7 in proposal) FTL-20-2107.2, PGT CA740 Alum. Outswing Casement Window (unit 8 in proposal) FTL-20-2107.3, PGT PW7620A Aluminum Fixed Window (unit 9 in proposal) and FTL-20-2107.4, PGT PW7620A Aluminum Fixed Window (unit 10 in proposal) all dated 07/13/20 and signed and sealed by Idalmis Ortega, P.E.

Ishaq I. Chanda, P.E.

Product Control Unit Supervisor NOA No 21-0510.05

# C. CALCULATIONS

- 1. Anchor verification calculations and structural analysis, complying with FBC 2020, 7<sup>th</sup> Edition, prepared by manufacturer, dated 07/14/20, signed and sealed by A. Lynn Miller, P. E.
- 2. Glazing complies with ASTM E1300–04, -09, -12 and -16.

# D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

#### E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 17-0808.02 issued to Kuraray America, Inc. (former E.I. DuPont DE Nemours & Co., Inc.) for the "Sentry Glass ® Interlayer", expiring on 07/4/23.
- 2. Notice of Acceptance No. 19-0305.02 issued to Kuraray America, Inc. (Former E.I. DuPont DE Nemours & Co., Inc. for the "Kuraray Trofosil Ultra clear and color PVB Interlayer (Former Kuraray Butacite ® PVB interlayer)", expiring on 07/08/24.
- 3. Notice of Acceptance No. 18–0301.06 issued to Eastman Chemical Company (MA) (Former Solutia, Inc.) for the "Saflex CP Saflex and Saflex HP Composite Glass Interlayers w/ PET Core", expiring on 12/11/23.

#### F. STATEMENTS

- 1. Statement letter of conformance to FBC 2020 (7<sup>th</sup> Edition), issued by manufacturer, dated 07/14/20, signed and sealed by Lynn Miller, P. E.
- 2. Notification of Successor Engineer per the Florida Administrative Code Section 61G15-27.001, notifying original engineer that the successor engineer is assuming full professional and legal responsibility for all engineering documents pertaining to this NOA, dated 06/12/20, signed and sealed by A. Lynn Miller, P.E.

# G. OTHER

- 1. This NOA revises 17-0227.12 and updates FBC2020 expiring 10/25/22.
- 2. RER Test proposals #19-1155 dated 01/10/20 approved by Ishaq I. Chanda, P.E.

Ishan I. Chanda

Ishaq I. Chanda, P.E.

Product Control Unit Supervisor NOA No 21-0510.05

### 4. New Evidence submitted

#### A. DRAWINGS

1. Drawing No.165FD-IS-NOA Rev A (former 18-26D Rev A), titled "Series Sentinel 165 Balcony Breeze Aluminum Inswing Door", sheets 1 through 10 of 10, prepared by manufacturer, dated 07/14/20, signed and sealed by Lynn A. Miller, P.E.

#### B. TESTS

1. None.

# C. CALCULATIONS

1. None.

# D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

# E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 17-0808.02 issued to Kuraray America, Inc. (former E.I. DuPont DE Nemours & Co., Inc.) for the "Sentry Glass ® Interlayer", expiring on 07/4/23.
- 2. Notice of Acceptance No. **19-0305.02** issued to **Kuraray America**, **Inc.** (Former E.I. DuPont DE Nemours & Co., Inc. for the "Kuraray Trofosil Ultra clear and color PVB Interlayer (Former Kuraray **Butacite** ® **PVB interlayer**)", expiring on 07/08/24.
- 3. Notice of Acceptance No. 18–0301.06 issued to Eastman Chemical Company (MA) (Former Solutia, Inc.) for the "Saflex CP Saflex and Saflex HP Composite Glass Interlayers w/ PET Core", expiring on 12/11/23.

# F. STATEMENTS (submitted under file #20-0722.15)

1. Statement letter of conformance to FBC 2020 (7<sup>th</sup> Edition), issued by manufacturer, dated 07/14/20, signed and sealed by Lynn Miller, P. E.

### G. OTHER

1. This NOA renews #20-0722.15, expiring 07/28/26.

Ishaq I. Chanda, P.E.

' Ishaq I. Chanda, P.E. Product Control Unit Supervisor

NOA No 21-0510.05

# SENTINEL 165, "BALCONY BREEZE" INSWING DOOR ALUMINUM, IMPACT RESISTANT

#### GENERAL NOTES:


- THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE GTH AND 7TH EDITION FLORIDA BUILDING CODES (2017 / 2020) INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
- PRODUCT IS RATED FOR LARGE MISSILE IMPACT AND SMALL MISSILE IMPACT.
  MIAMI-DADE COUNTY APPROVED HURRICANE PROTECTION SYSTEMS (SHUTTERS) ARE NOT REQUIRED.
- ANCHORS SHALL BE AS LISTED, SPACED AS SHOWN ON DETAILS. ANCHORS EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.
- ANCHORING OR LOADING CONDITIONS NOT SHOWN IN THESE DETAILS ARE NOT PART OF THIS APPROVAL.
- MATERIALS INCLUDING BUT NOT LIMITED TO STEEL / METAL SCREWS THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2017 / 2020 FLORIDA BUILDING CODE AND ADOPTED STRANDARDS.
- METAL STRUCTURES NOT BY CGI WINDOWS AND DOORS, INC. TO BE DESIGNED TO SUPPORT THE LOADS IMPOSED BY THIS GLAZING SYSTEM AND TO TRANSFER SUCH LOADS TO THE BUILDING STRUCTURAL MEMBERS, TO BE REVIEWED BY BUILDING OFFICIAL.
- THE DESIGN LOADS SHOWN IN THIS DOCUMENT ARE ALLOWABLE DESIGN LOADS.

  ULTIMATE LOAD OBTAINED FROM ASCE 7-10, MULTIPLY BY 0.6 SHALL BE LESS THAN OR EQUAL TO MAX.

  DESIGN LOAD IN THIS DOCUMENT.
- DOORS ARE APPROVED FOR AIR AND WATER INFILTRATION (EXCEPT ADA THRESHOLD, SEE NOTE BELOW FOR OVERHANG REQUIREMENTS).

#### OVERHANG REQUIREMENT:

ADA THRESHOLD IS NOT APPROVED IN AREAS WHERE WATER INFILTRATION REQUIREMENT IS NEEDED. IT COULD BE INSTALLED AT LOCATIONS PROTECTED BY AN OVERHANG MEETING THE CRITERIA IN ILLUSTRATION BELOW OR IN NON-HABITABLE AREAS WHERE WATER INFILTRATION IS ACCEPTED, PER FBC REQUIREMENTS.

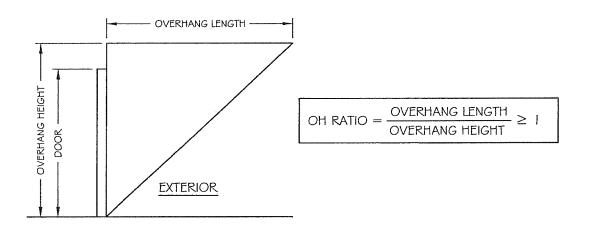

TYPICAL ANCHORS: (SEE ELEVATIONS, SHEET 2, FOR SPACING)

1/4" DIA. ULTRACON BY 'ELCO' (Fu= 177 KSI, Fy= 155 KSI)

INTO 2BY WOOD BUCKS OR WOOD STRUCTURES
1-1/2" MIN. PENETRATION INTO WOOD (HEAD, SILL OR JAMB)

THRU 1BY WOOD BUCKS OR DIRECTLY INTO MASONRY OR CONCRETE 1-1/4" MIN. EMBED INTO CONCRETE, FILLED BLOCK OR HOLLOW BLOCK

1/4" DIA. ULTRACON+ BY 'DEWALT' (FU= 164 KSI, FY= 148 KSI)

INTO 2BY WOOD BUCKS OR WOOD STRUCTURES
1-3/8" MIN. PENETRATION INTO WOOD (HEAD, SILL OR JAMB)

THRU I BY WOOD BUCKS OR DIRECTLY INTO MASONRY OR CONCRETE 1-1/4" MIN. EMBED INTO CONCRETE, FILLED BLOCK OR HOLLOW BLOCK

### #14 SMS OR SELF DRILLING SCREWS (GRADE 2 CRS)

INTO 2BY WOOD BUCKS OR WOOD STRUCTURES
1-1/2" MIN. PENETRATION INTO WOOD (HEAD, SILL OR JAMB)

STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

INTO MIAMI-DADE COUNTY APPROVED MULLIONS
INTO METAL STRUCTURE.
STEEL: 12 GA. MIN. (Fy = 36 KSI MIN.)
ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.)

TYPICAL EDGE DISTANCE

INTO CONCRETE AND MASONRY = 2-1/2" MIN.
INTO WOOD STRUCTURE = 1" MIN.
INTO METAL STRUCTURE = 3/4" MIN.

CONCRETE f'c = 3000 PSI MIN.C-90 HOLLOW/FLLED BLOCK fm = 2000 PSI MIN.

# SEALANTS:

ALL FRAME CORNERS, JOINTS, MULLION SEAMS AND PERIMETER GLAZING BEAD TO FRAME INSTALLATION FASTENERS SEALED WITH SILICON SEALANT.

# WOOD BUCKS:

IX OR 2X WOOD BUCKS NOT BY CGI WINDOWS AND DOORS, INC. MUST BE PROPERLY SECURED TO SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.


PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 20-0722.15


Expiration Date 07/28/2021


By Ishay 1. Chanda


Miami-Dade Product Control

REVISED FOR 2020 FBC,
ADDED GEN. NOTES,
ANCHOR TYPE,
BACKBEDDING TYPES &
REFORMATTED - JR - 6/26/20

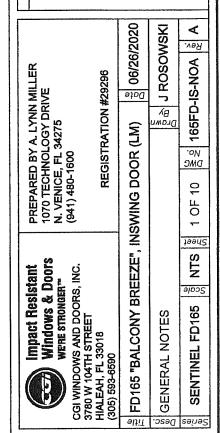



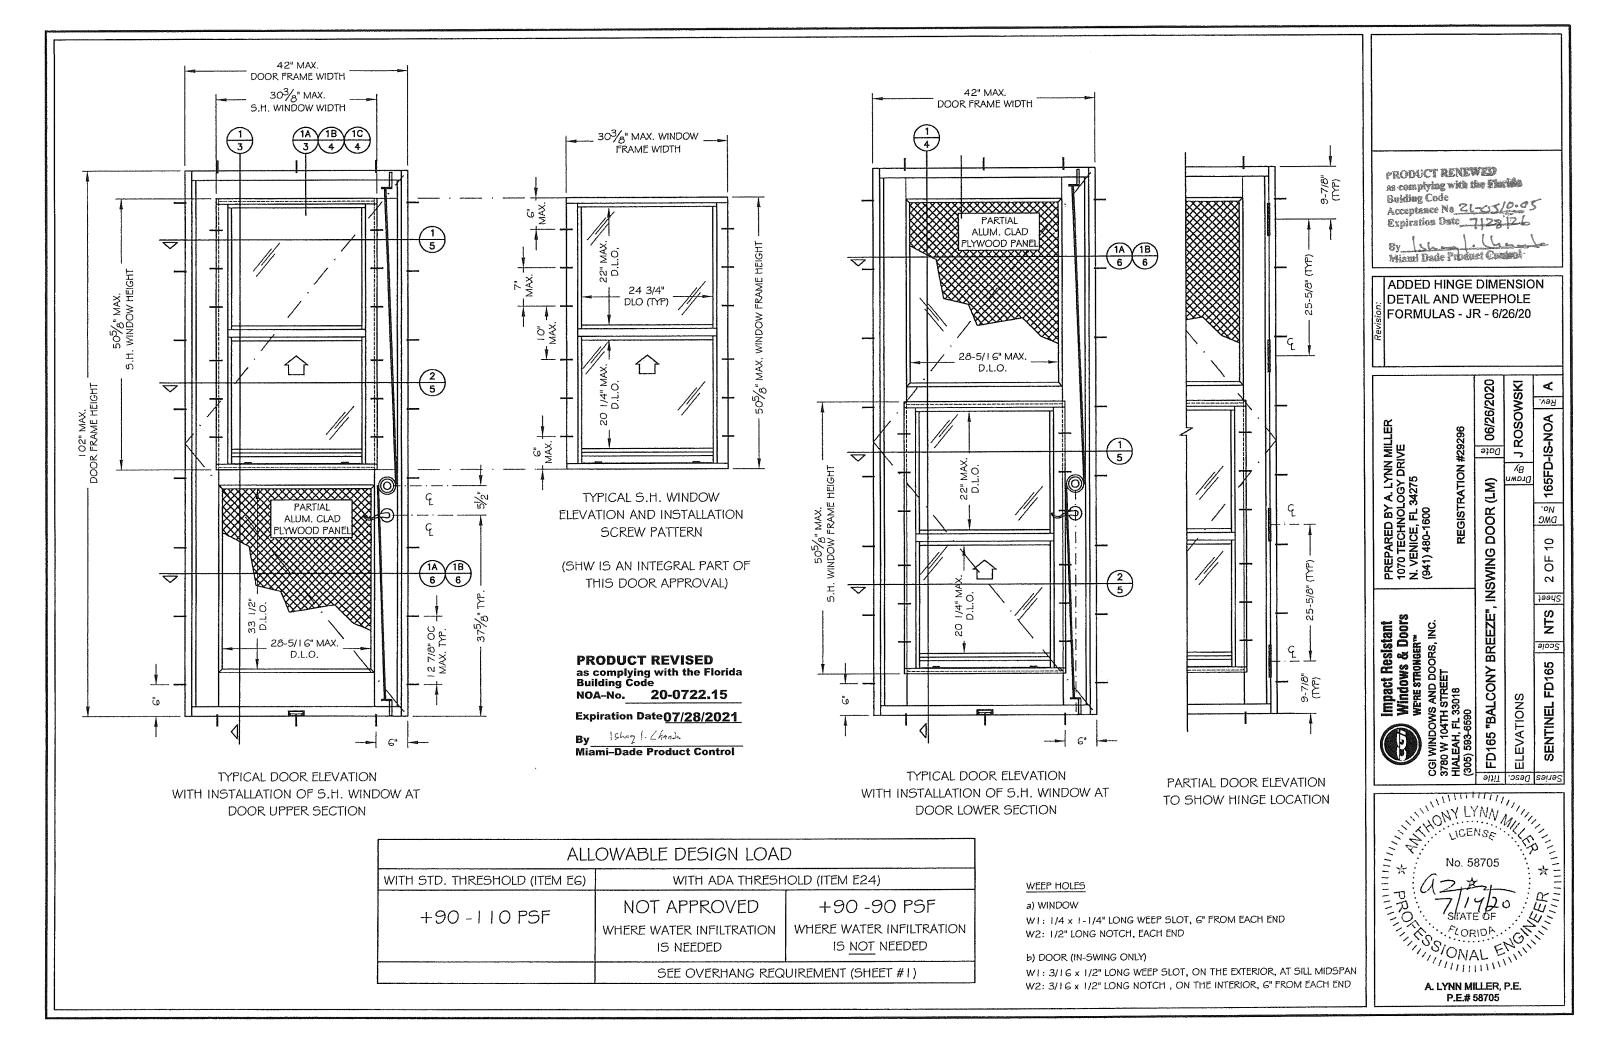


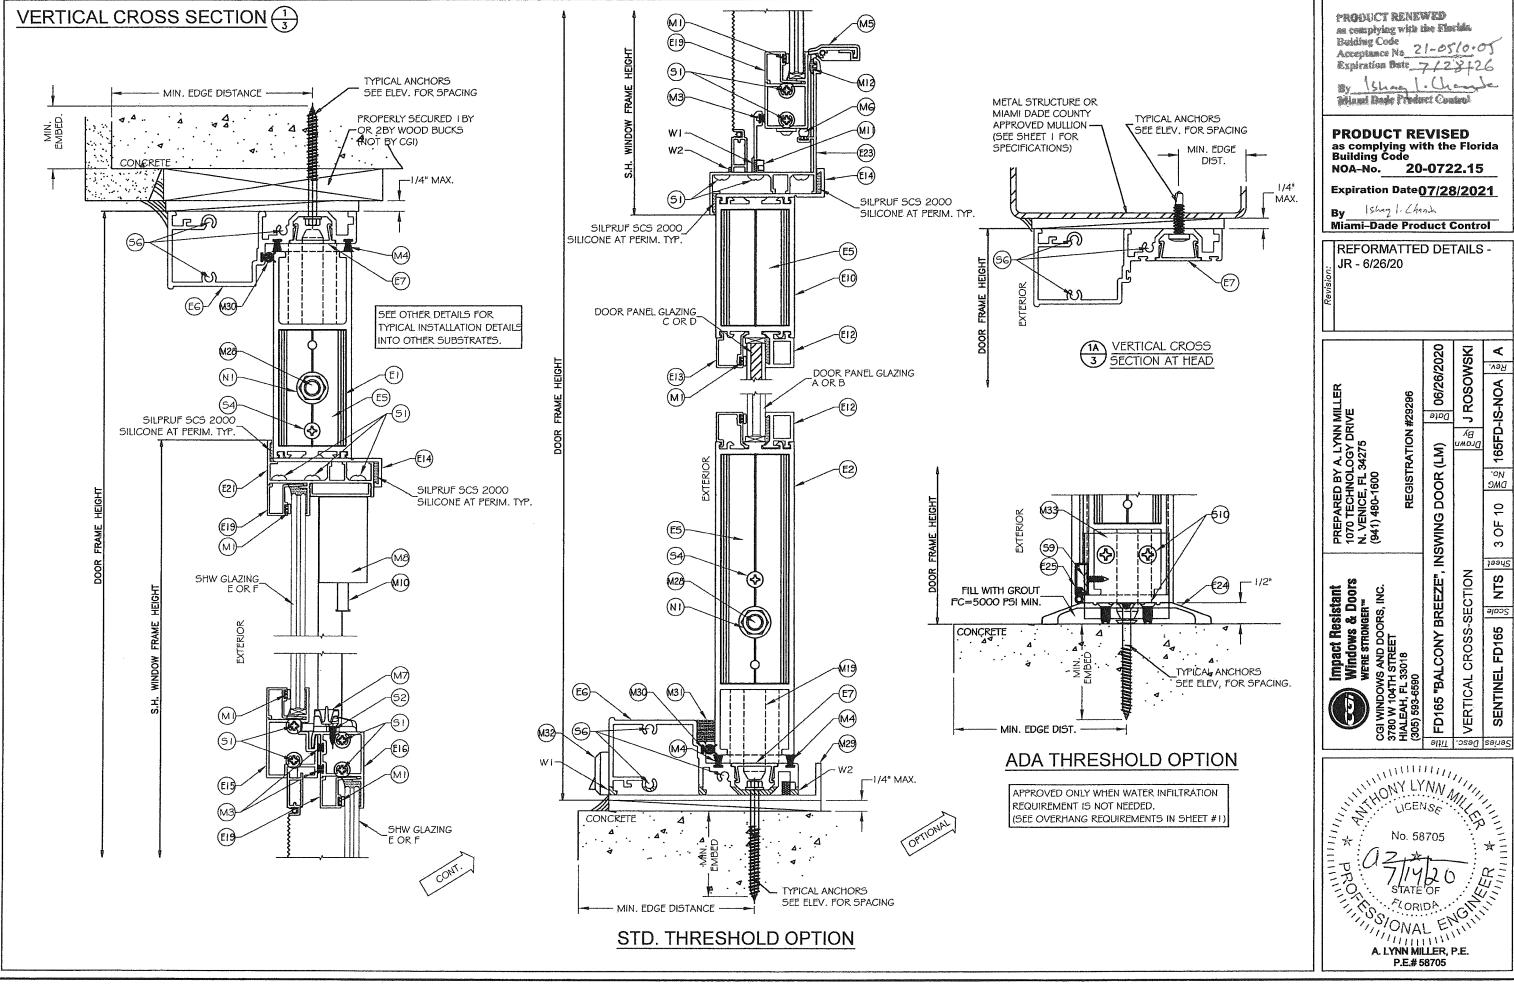



Acceptance No 21-05/0.05 Expiration Bate 7/28/126


as complying with the Florida Building Code

165FD-IS-NOA Drown By No. 9 QF က Sheet NTS Scale SENTINEL FD165



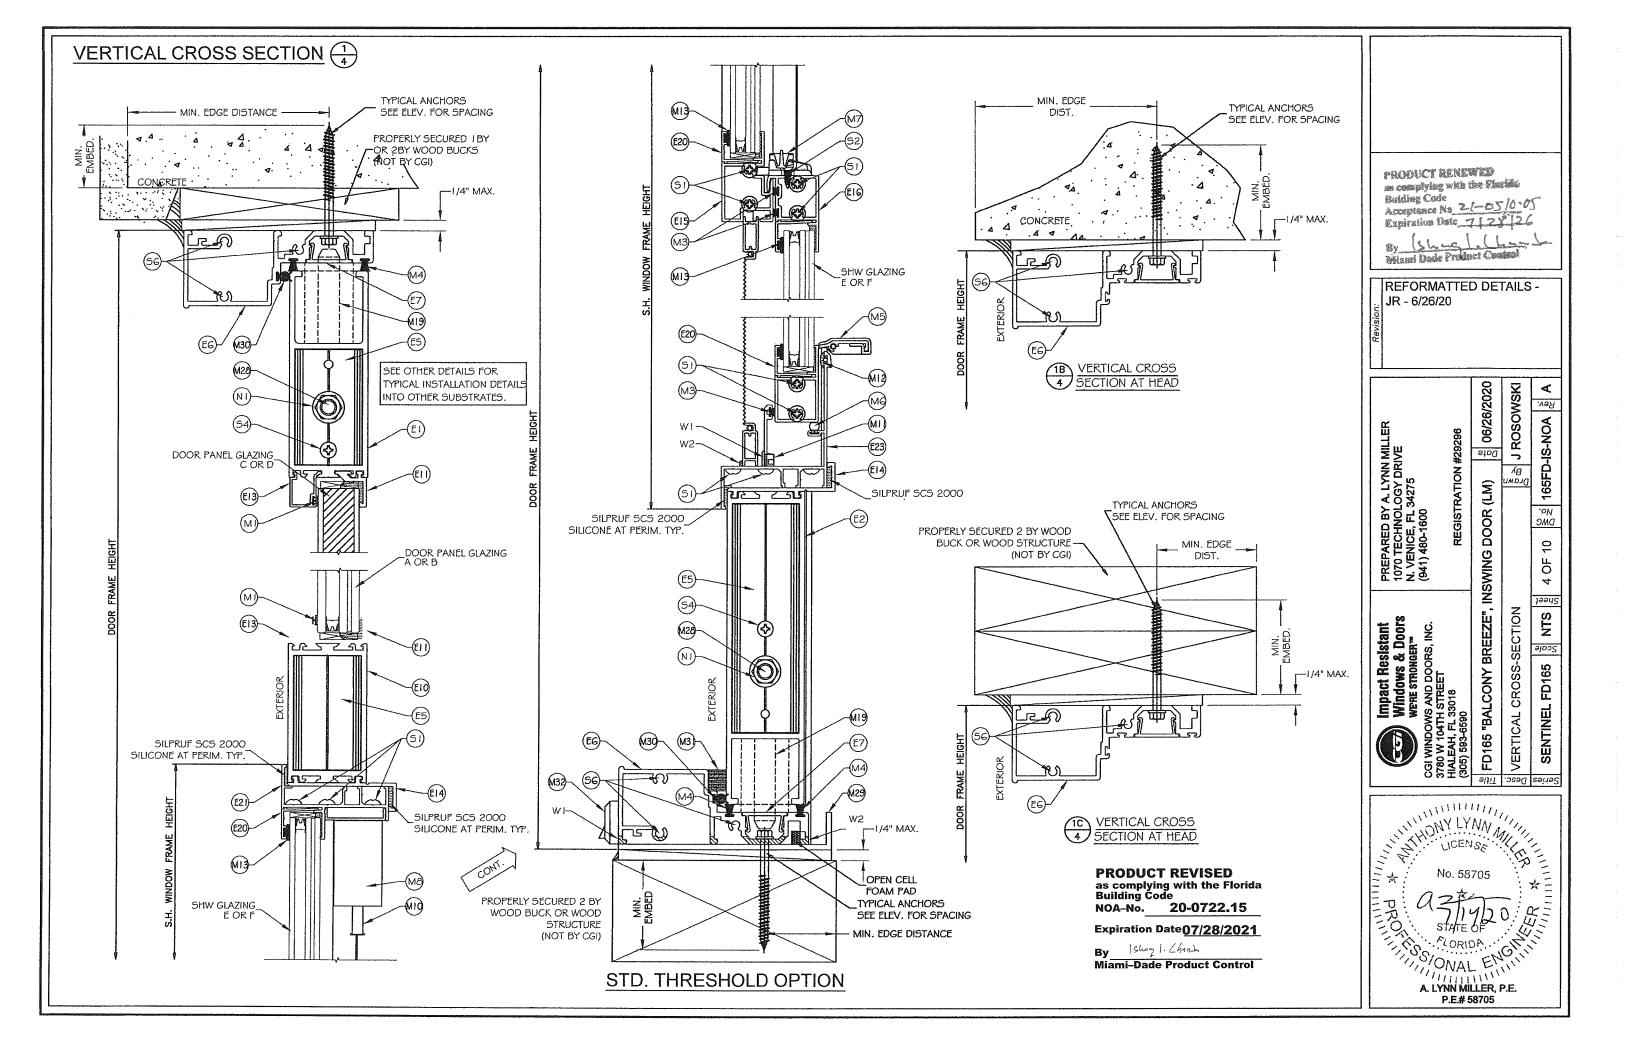

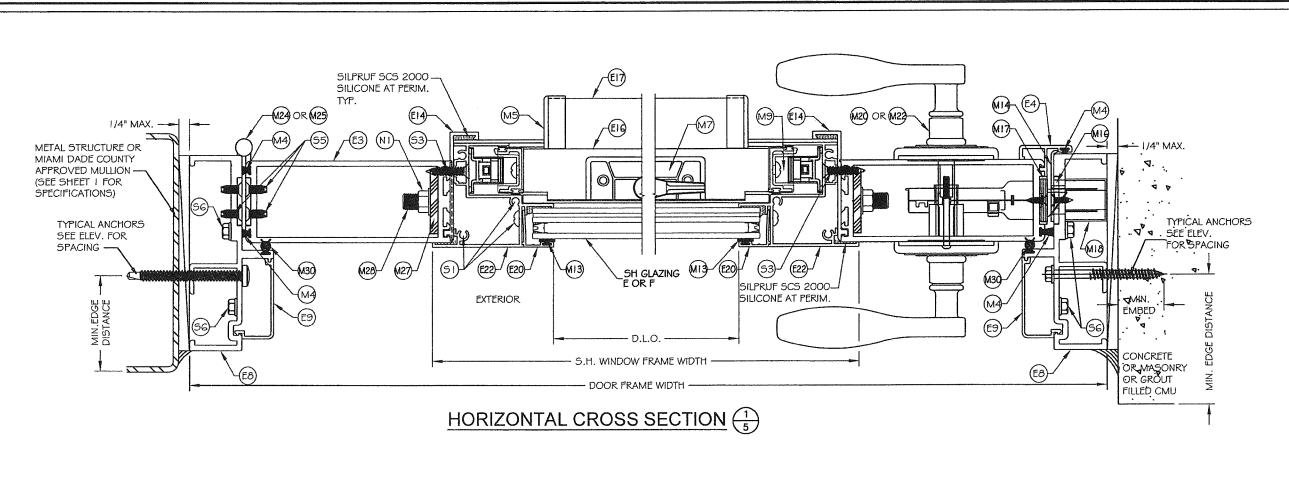

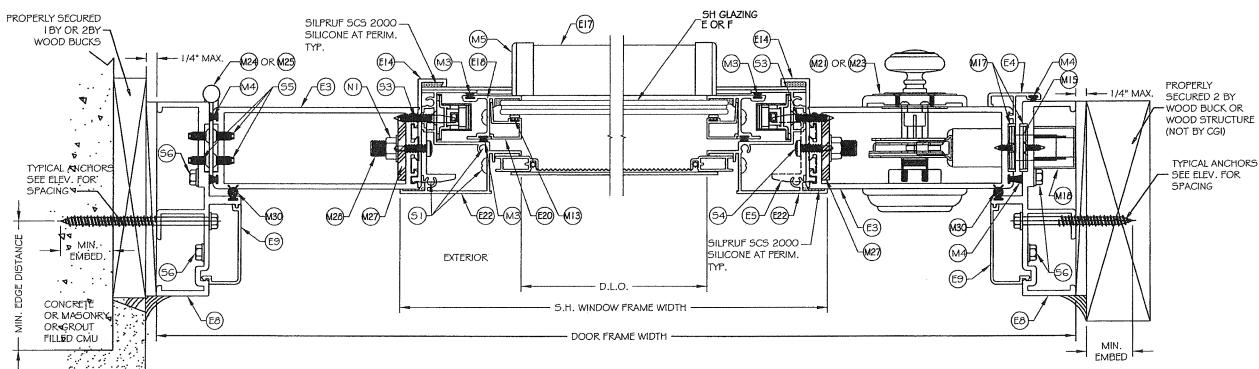

HORIZONTAL CROSS SECTION (2)
5

PRODUCT REVISED
as complying with the Florida
Building Code

NOA-No. 20-0722.15
Expiration Date 07/28/2021


By Island I. Chand


Miami-Dade Product Control

PRODUCT RENEWED
as complying with the Marinis
Building Code
Acceptance No. 21-0510.05
Expiration Date 7122426
By Shand L. Chandle
Miami Dade Product Control


REFORMATTED DETAILS -

| Impact Resistant | PREPARED BY A. LYNN MILLER | 1070 TECHNOLOGY DRIVE | 1070

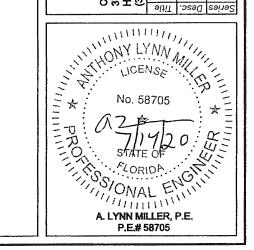


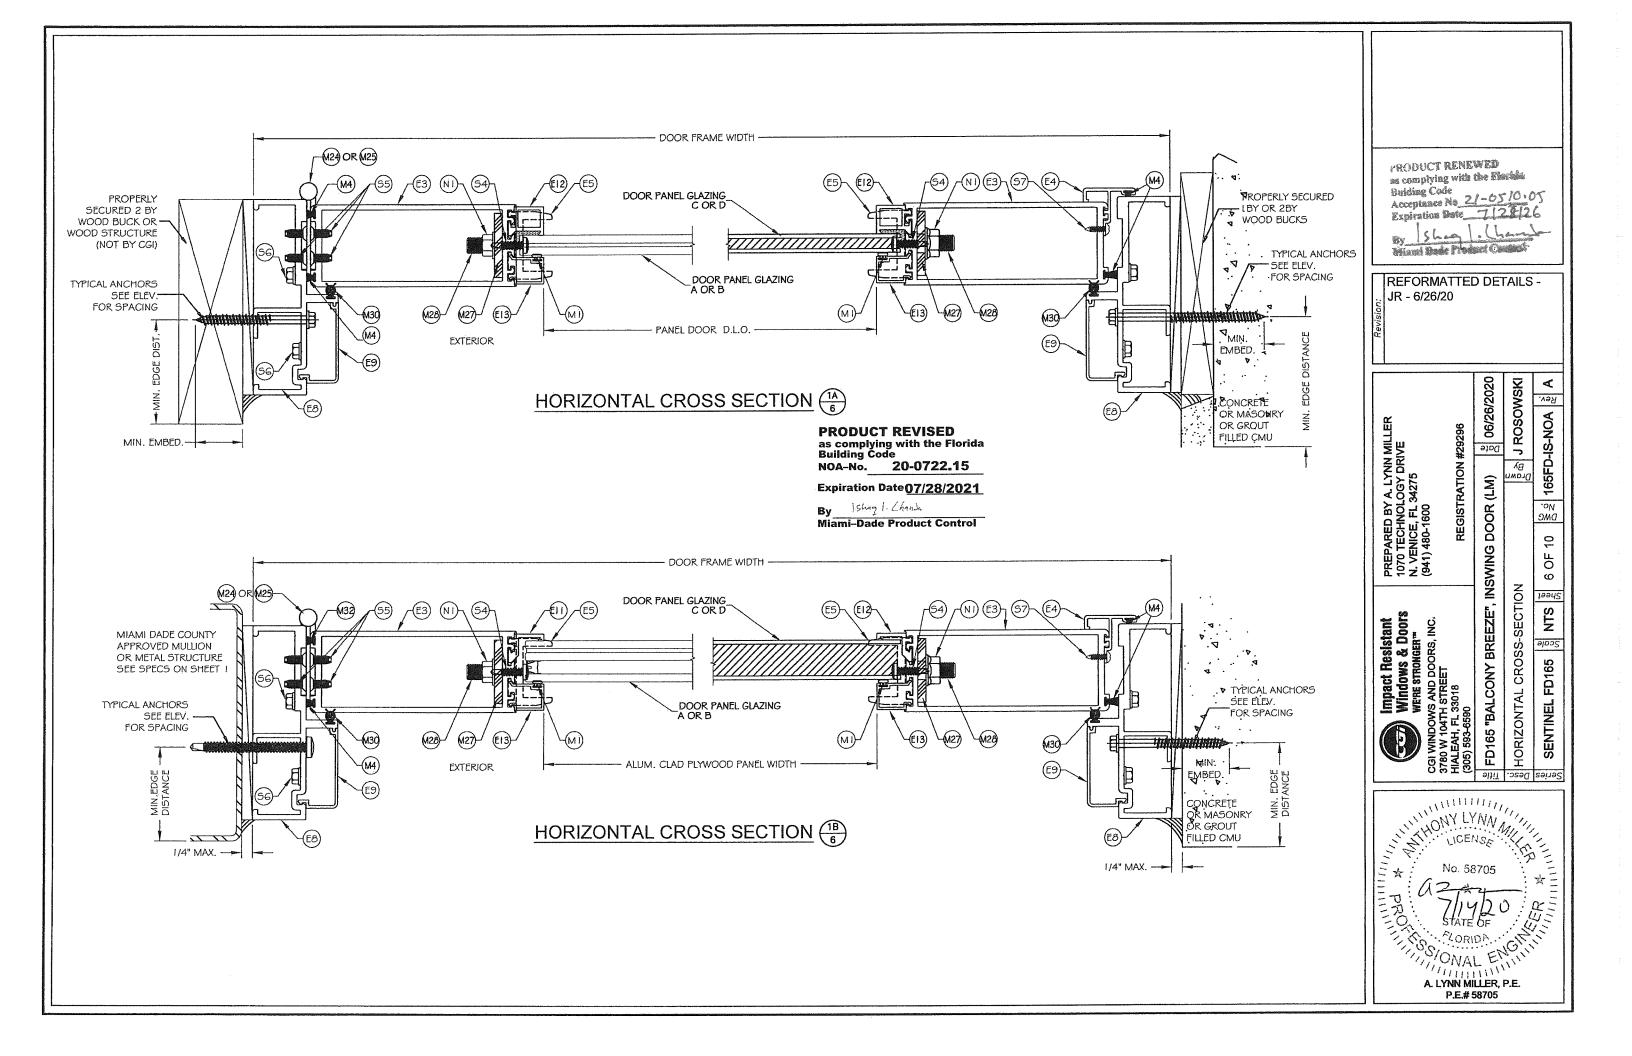


# DOOR PANEL GLAZING DETAILS & OPTIONS

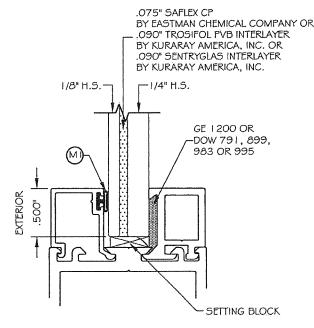


GLASS TYPE A
7/16" OVERALL THICKNESS

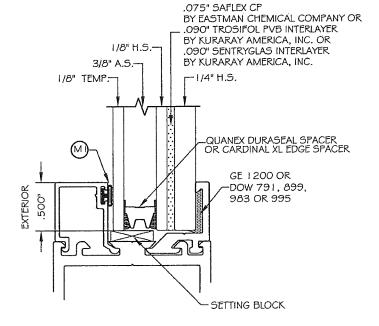

GLASS TYPE B 1" OVERALL THICKNESS

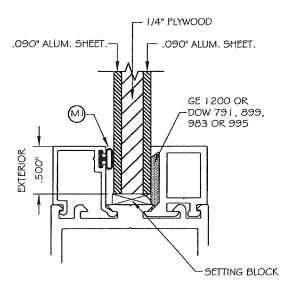


ALUM. CLAD PLYWOOD TYPE C 7/16" OVERALL THICKNESS

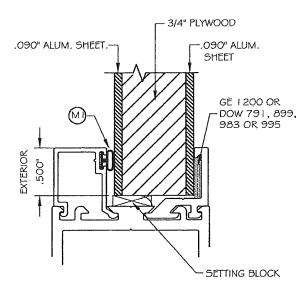

ALUM. CLAD PLYWOOD TYPE D
1" OVERALL THICKNESS

# SINGLE HUNG WINDOW GLAZING DETAILS & OPTIONS

.075" SAFLEX CP

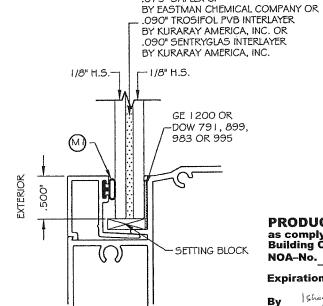


PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 20-0722.15

Expiration Date <u>07/28/2021</u>

By Sheq 1. Chank
Miami-Dade Product Control


GLASS TYPE E 5/16" OVERALL THICKNESS

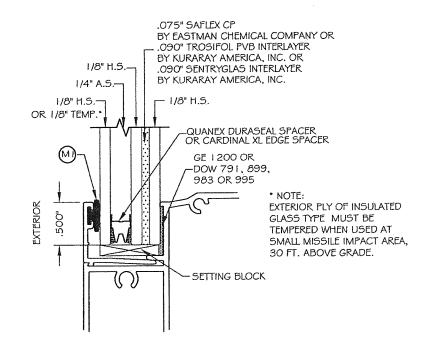

GLASS TYPE F 11/16" OVERALL THICKNESS


NOTE:

GLASS COMPLIES WITH ASTM E 1 300-09 (3 SEC. GUSTS)




ADDED BACKBEDDING - JR - 6/26/20

J ROSOWSKI 06/26/2020 Rev. PREPARED BY A. LYNN MILLER 1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941) 480-1600 165FD-IS-NOA Date )rowr By DOOR (LM) NO. DMC 10 INSWING P ~ Sheet Windows & Doors
Were stronger
we and doors, inc.
H STREET BREEZE", NTS aloos **SENTINEL FD165** GLAZING DETAILS FD165 "BALCONY Series Desc. Title



BILL OF MATERIALS								
ITEM	PART No.	QUANTITY	DESCRIPTION		SUPPLIER			
ΕI	AL-500A	1	DOOR PANEL TOP RAIL	6063-T6	KEYMARK			
E2	AL-501	1	DOOR PANEL BOTTOM RAIL	6063-T6	KEYMARK			
E3	AL-502	2	DOOR PANEL VERTICAL STILE	6063-T6	KEYMARK			
E4	AL-505	-	ASTRAGAL	6063-T5	KEYMARK			
E5	AL-506	6	SHEAR BLOCK	6063-T6	KEYMARK			
E6	AL-507	2	DOOR FRAME HEAD / SILL	6063-T6	KEYMARK			
E7	AL-508	2	DOOR FRAME HEAD / SILL SCREW CAP	6063-T5	KEYMARK			
E8	AL-509	2	DOOR FRAME JAMB	6063-T6	KEYMARK			
E9	AL-511	2	JAMB SCREW COVER	6063-T5	KEYMARK			
EIO	AL-514	l	TRUE MUNTIN (4-5/8")	6063-T5	KEYMARK			
EII	AL-515	A5 REQD.	GLAZING ADAPTOR (INSULLAM. GLASS)	6063-T6	KEYMARK			
E12	AL-519	AS REQD.	GLAZING ADAPTOR (7/16" LAM. / SOLID PANEL)	6063-T6	KEYMARK			
E13	AL-396	AS REQD.	GLAZING BEAD (7/16" LAM. / INSULLAM. GLASS)	6063-T5	KEYMARK			
E14	AL-1061	4/DOOR	WINDOW FILLER	6063-T6	KEYMARK			
E15	AL-103	1	WINDOW FIXED MEETING RAIL	6063-T6	KEYMARK			
E16	AL-104	1	WINDOW LOCK RAIL	6063-T6	KEYMARK			
E17	AL-105	1	WINDOW LOOK TO THE WINDOW HANDLE RAIL	6063-T6	KEYMARK			
E18	AL-106	2	WINDOW SASH RAIL	6063-T6	KEYMARK			
	<u> </u>	AS REQD.	GLAZING BEAD (5/16" LAM. GLASS)	6063-T5	KEYMARK			
E19	AL-107		GLAZING BEAD (3/4" INSULLAM. GLASS)	6063-T5	KEYMARK			
E20	AL-108	AS REQD.		6063-T6	KEYMARK			
E21	AL-135	1	WINDOW FRAME HEAD		KEYMARK			
E22	AL-136	2	WINDOW FRAME JAMB	6063-T6				
E23	AL-137	1	WINDOW FRAME SILL	6063-T6	KEYMARK			
E24	AL-540	1	ADA SADDLE THRESHOLD	6063-T6	SCREEN TECH			
E25	HD-DOOR SWEEP	1	DOOR SWEEP (OPTIONAL)	ALUM.	SCREEN TECH			
МІ	382V	AS REQD.	GLAZING BULB (DUROMETER 75/80 SHORE A)	PVC	MELTPOINT			
M2	BL-110-2340	2/WINDOW	BLOCK ¢ TACKLE BALANCE	-	BSI			
мз	W23201	AS REQD.	.187" x 200" ULTRA-FIN WEATHERSTRIP	-	ULTRAFAB			
M4	W33321	A5 REQD.	.187" x 320" ULTRA-FIN WEATHERSTRIP		ULTRAFAB			
M5	HD-131-R/L	I/EACH	HANDLE RAIL END CAP (R) RIGHT AND (L) LEFT	NYLON	M&M PLASTICS			
M6	E26018WN	IWINDOW	BULB WEATHERSTRIP, AT WINDOW SILL	PVC	ULTRAFAB			
M7	HD-CAM LOCK	I WINDOW	WINDOW CAM LOCK	ZINC	TRUTH			
M8	HD-132	2/5A5H	SASH STOP, 2" LONG	PVC	PROTOTYPE			
M9	HD-125	2/SASH	SASH CAM	PVC	M&M PLASTICS			
МІО	HD-121	2/WINDOW	SASH TAKE OUT CLIP	-	BSI			
MII	HD-146-6	2WINDOW	WINDOW WEEP COVER	PVC	AMESBURY			
MI2	HD-134	I,WINDOW	SILL SPACER	PVC	PROTOTYPE			
M13	HD-12-10106	AS REQD.	GLAZING GASKET (INSULLAM.)	PVC	MELTPOINT			
M14	HD-537	1	LATCH LOCK STRIKE PLATE	S.STEEL	BALDWIN			
M15	HD-538		DEADBOLT STRIKE PLATE	S.STEEL	BALDWIN			
MIG			LATCH LOCK STRIKE PLATE SHIM	NYLON	_			
MI7	HD-536N HD-390P	1/EACH	LATCH LOCK STRIKE & DEADBOLT PLATE SPACER	NYLON	-			
	HD-STRIKE BOX	1/EACH	LATCH LOCK STRIKE & DEADBOLT DUST BOX	NYLON	_			
			I BALOIT LOOK STAINE & DEADDOLT DOST DOX	1 11 12011	1			
			BOIT LOCK ASSEMBLY	S STFFI	CGI			
м19	HD-525-9-REV	1	BOLT LOCK ASSEMBLY	5.STEEL	CGI			
м19 м20	HD-525-9-REV HD-5455.056		WAVE SATIN NICKEL STRIKE LEVER	-	BALDWIN .			
M19 M20 M21	HD-525-9-REV HD-5455.056 HD-8231.056	1	WAVE SATIN NICKEL STRIKE LEVER TRADITIONAL SATIN NICKEL DEADBOLT	-	BALDWIN BALDWIN			
M19 M20 M21 M22	HD-525-9-REV HD-5455.056 HD-8231.056 HD-34-10116	1	WAVE SATIN NICKEL STRIKE LEVER TRADITIONAL SATIN NICKEL DEADBOLT WAVERLIE SATIN STRIKE LEVER	-	BALDWIN BALDWIN COPPER CREE			
M19 M20 M21 M22 M23	HD-525-9-REV HD-5455.056 HD-8231.056 HD-34-10116 HD-DB241055	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	WAVE SATIN NICKEL STRIKE LEVER TRADITIONAL SATIN NICKEL DEADBOLT WAVERLIE SATIN STRIKE LEVER SATIN STAINLESS DEADBOLT		BALDWIN BALDWIN COPPER CREE COPPER CREE			
M19 M20 M21 M22 M23 M24	HD-525-9-REV HD-5455.056 HD-8231.056 HD-34-10116 HD-DB241055 HD-CH-108-W	I I I I 4/LEAF	WAVE SATIN NICKEL STRIKE LEVER TRADITIONAL SATIN NICKEL DEADBOLT WAVERLIE SATIN STRIKE LEVER SATIN STAINLESS DEADBOLT 4-1/2" x 4" x 0.140" THK. HINGE	- - - - - ÂLUMINUM	BALDWIN BALDWIN COPPER CREE COPPER CREE SULLIVAN			
M19 M20 M21 M22 M23 M24 M25	HD-525-9-REV HD-5455.056 HD-8231.056 HD-34-10116 HD-DB241055	I I I I 4/LEAF 4/LEAF	WAVE SATIN NICKEL STRIKE LEVER TRADITIONAL SATIN NICKEL DEADBOLT WAVERLIE SATIN STRIKE LEVER SATIN STAINLESS DEADBOLT 4-1/2" x 4" x 0.140" THK. HINGE 4-1/2" x 4" x 0.140" THK. HINGE	- - - - ALUMINUM S.STEEL	BALDWIN BALDWIN COPPER CREE COPPER CREE SULLIVAN HAGER			
M19 M20 M21 M22 M23 M24 M25 M26	HD-525-9-REV HD-5455.056 HD-8231.056 HD-34-10116 HD-DB241055 HD-CH-108-W	I I I I 4/LEAF	WAVE SATIN NICKEL STRIKE LEVER TRADITIONAL SATIN NICKEL DEADBOLT WAVERLIE SATIN STRIKE LEVER SATIN STAINLESS DEADBOLT 4-1/2" x 4" x 0.140" THK. HINGE 4-1/2" x 4" x 0.140" THK. HINGE THREE POINT LOCK MECHANISM ASSEMBLY	- - - - ALUMINUM S.STEEL -	BALDWIN BALDWIN COPPER CREE COPPER CREE SULLIVAN HAGER CGI			
M18 M19 M20 M21 M22 M23 M24 M25 M26 M27 M28	HD-525-9-REV HD-5455.056 HD-8231.056 HD-34-10116 HD-DB241055 HD-CH-108-W	I I I I 4/LEAF 4/LEAF	WAVE SATIN NICKEL STRIKE LEVER TRADITIONAL SATIN NICKEL DEADBOLT WAVERLIE SATIN STRIKE LEVER SATIN STAINLESS DEADBOLT 4-1/2" x 4" x 0.140" THK. HINGE 4-1/2" x 4" x 0.140" THK. HINGE	- - - - ALUMINUM S.STEEL	BALDWIN BALDWIN COPPER CREE COPPER CREE SULLIVAN HAGER			

	BILL OF MATERIALS								
ITEM	PART No.	QUANTITY	DESCRIPTION	MATERIAL	SUPPLIER				
M30	32084	AS REQ.D	FOAM-TITE CLOSED CELL COMPRESSION SEAL	-	AMESBURY				
мзі	RE41	AS REQ.D	1/2 x1/2" SELF ADHESIVE CLOSED CELL FOAM SEAL	EPDM	FRANK LOWE				
M32	HD-542P	ı	IN-SWING DOOR WEEP COVER, AT MIDSPAN	PVC	-				
M33	HD-CLIP	1	2" X 2" X 1/4" THK. ALUM. ANGLE, 2" LG.	ALUM.	-				
SI	-	2 OR 3/CORNER	#10 x 1-1/4" PHP. PH. SMS. WINDOW ASSY.	S. STEEL	-				
52	-	2/LOCK	#6 x 1/2" PHP. FH. SMS. SWEEP LOCK ASSY.	S. STEEL	-				
53	-	AS REQD.	#10 x 1" PHP. FH. SMS. WINDOW TO DOOR ATTACH	S. STEEL	-				
54	-	1/EACH	$\#10 \times 3/4$ " PHP. PH. SMS. TEK SHEAR BLOCK ASSY.	S. STEEL	-				
55	-	8/HINGE	#12-24 x 1/2" PHP. FH. UC. TF. HINGE ASSY.	S. STEEL	*				
56	-	3/CORNER	#12 x 1-1/4" HH. SMS. DOOR FRAME ASSY.	S. STEEL	-				
57	-	5/LEAF	#6 x 1/2" PHP. TH. SMS. ASTRAGAL ASSY.	S. STEEL	-				
58	-	I/BOLT LOCK	#10 x 3/4" PHP. PH. SMS. BOLT LOCK ASSY.	S. STEEL	-				
59	-	2/LEG	#6 x 1/2" PHP. PH. 5MS.	S. STEEL	-				
510	-	4/CLIP	#12-24 X 1/2" PHP. FH. UC.	5. STEEL	-				
NI	-	4/LEAF	Ø3/8"-16 SERRATED-FLANGE LOCKNUT (ZINC PLATED)	STEEL	-				

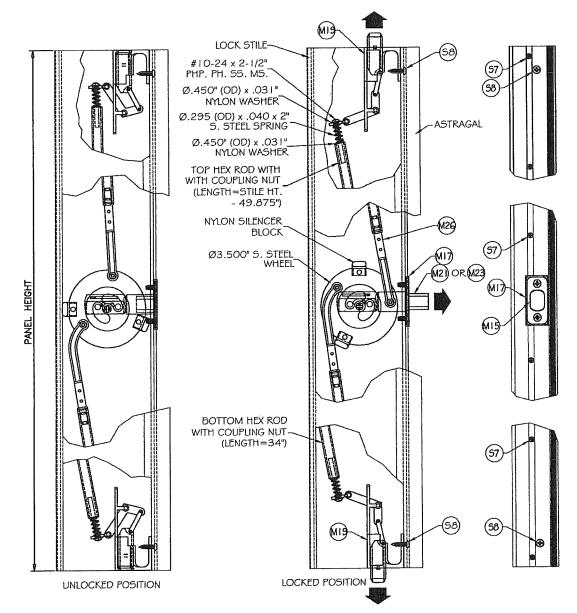

PROPRIETARY THREE-POINT LOCK MECHANISM DETAIL

as complying with the Florida Building Code NOA–No. 20-0722.15

Expiration Date <u>07/28/2021</u>

By Ishay I. Chank
Miami-Dade Product Control

MOVED HARDWARE DETAILS TO SHEET - JR -6/26/20

± 06/26/2020 J ROSOWSKI Rev. PREPARED BY A. LYNN MILLER 1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941) 480-1600 165FD-IS-NOA REGISTRATION #29296 Drown Ву FD165 "BALCONY BREEZE", INSWING DOOR (LM) No. DMC 10 8 OF BOM AND HARDWARE DETAILS Sheet NTS Scale SENTINEL FD165 Series Desc. Title

